REFLECTION

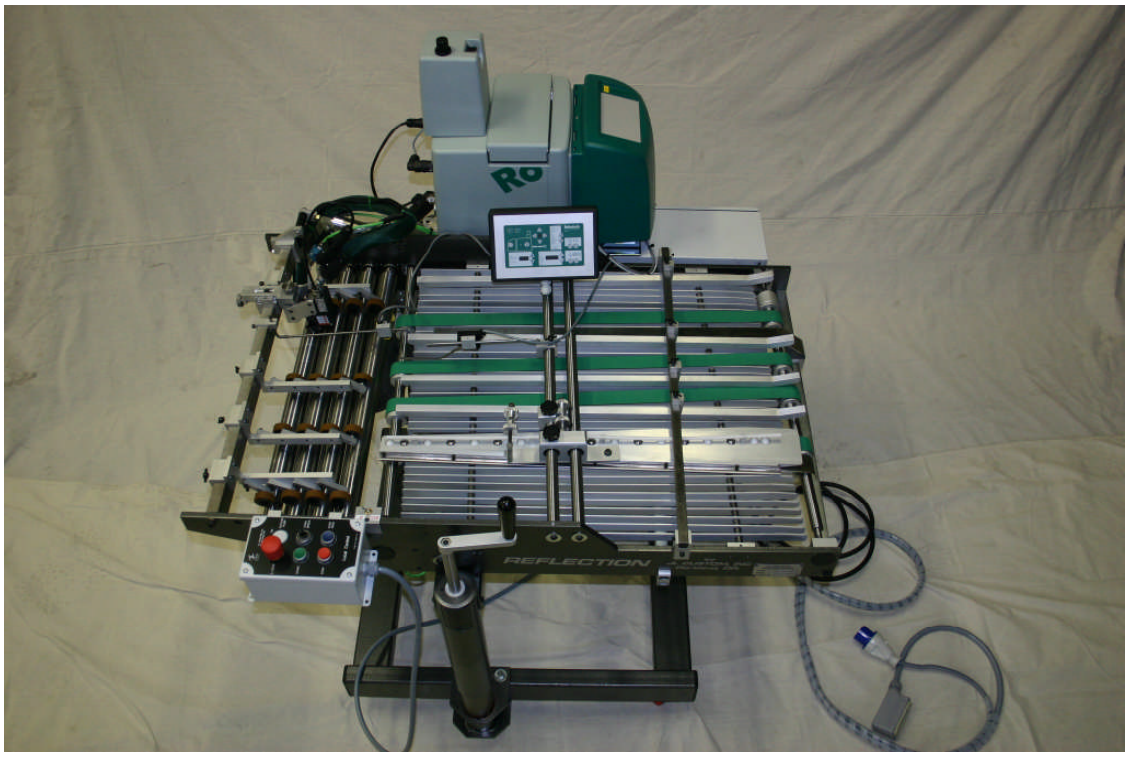

SPECIFICATIONS:

WIDTH:	**32.0**	**Sheet:**	**Minimum 5” 5.5”**
HEIGHT:	**Minimum 31.0”**		**Maximum31” x 30”L**
Length			
POWER:	**3 PHASE, 220V 10 AMP**		
AIR Required:	**80PSI, 1.0Cfm**		
MOTOR	**AC INVERTER DRIVE 24VDC CONTROLS**		

- **36” MULTIPLE BELTS ASSY WITH MARBLE TRACK**
- **MICRO ADJUSTMENT FOR MARBLE TRACK GUIDE**
- **FOUR (4) ANVIL ROLLERS**
- **FOUR (4) CONTROL ROLLER ASSY**
- **FLAT TRANSMISSION BELT DRIVE**
- **SWIVEL LOCK AND POSITION LOCK CASTERS**
- **STAINLESS STEEL GUARDS**
- **UL LISTED AND APPROVED ELECTRICAL COMPONETS**
- **HEAVY DUTY STEEL FRAME**
- **MACHINE IS EQUIPPED WITH SIMPLE SAND ALONE ELECTRICAL ENCLOSURE (JL CUSTOM NICO4)**
- **CAN BE UP GRATED FOR MBO INTEGRATION**